NOTE I: REMOVE ALL SHARP EDGES AND BURRS.

ISSUE NO. 2
DATE 10/8/13

203
175
14
63
19
29
∅ 8.8
190
95
10
50
32
1.0

OPTIONAL DRAIN VENT LOCATION

FEP COATED STAINLESS STEEL CABLE LENGTH – 2 METERS, STANDARD

DRAIN VENT

OPTICAL CABLE PASS THRUS 3 - 7 MM CABLE DIAMETER

22
44
7
89
59
41
229
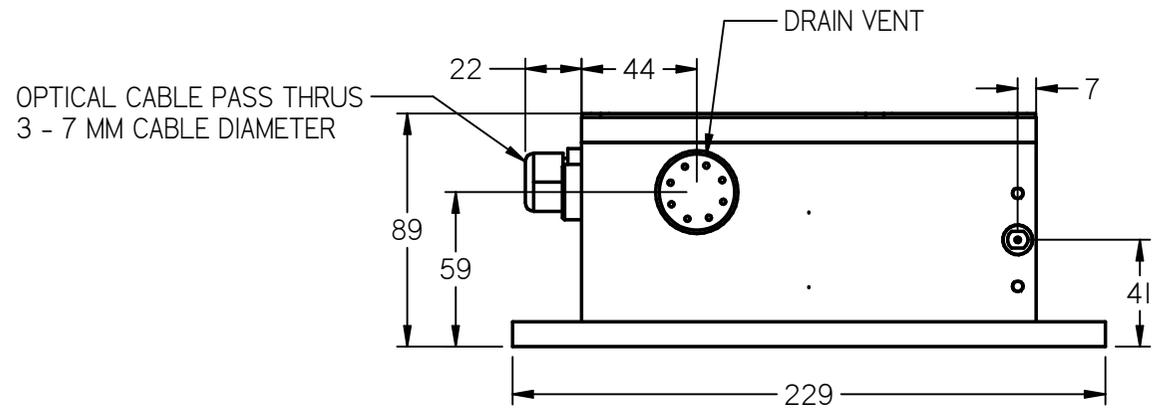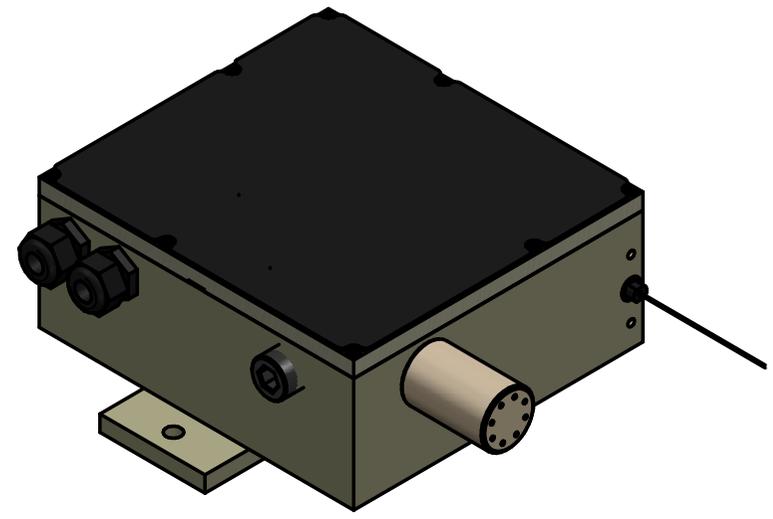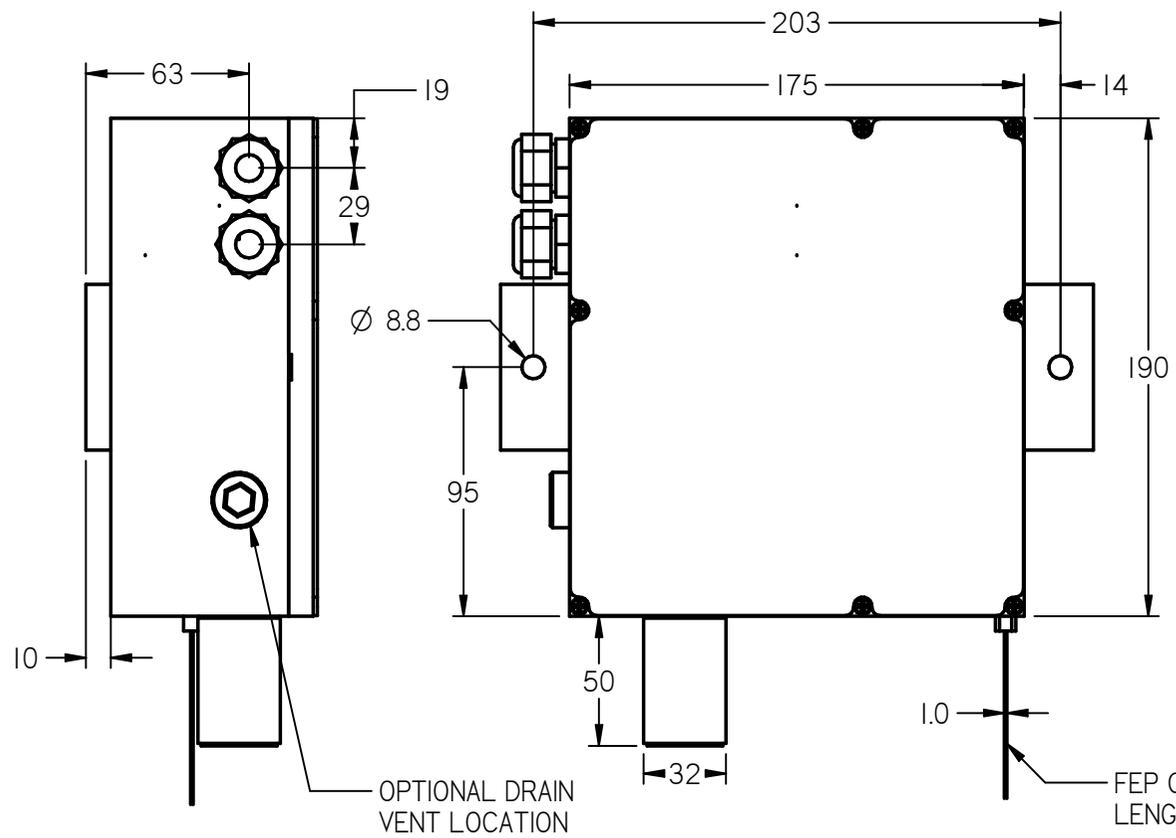
os5500 DISPLACEMENT GAGE	
RANGE	OVERTRAVEL
150 MM	315 MM
300 MM	165 MM
450 MM	15 MM

os5500 DISPLACEMENT GAGE CUSTOMER DRAWING

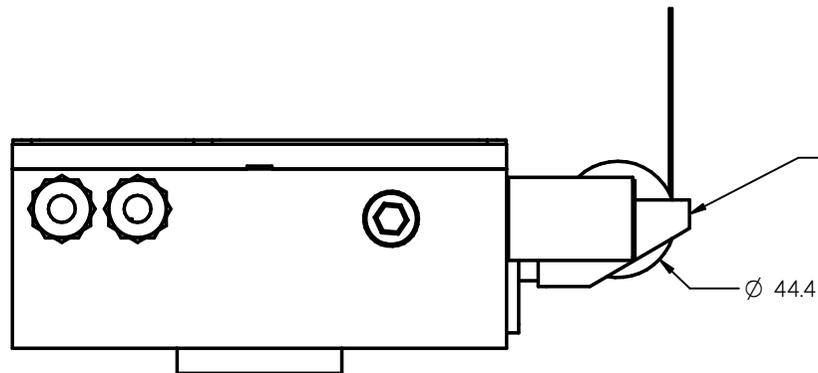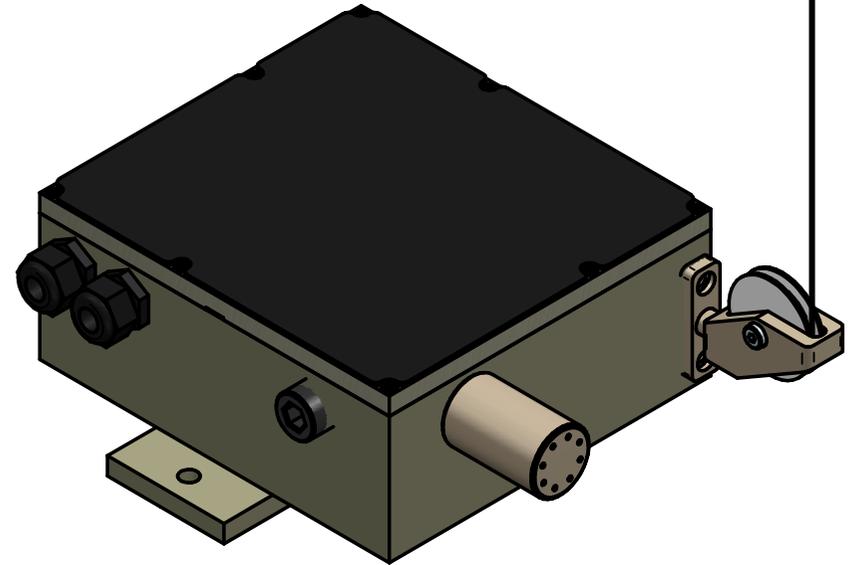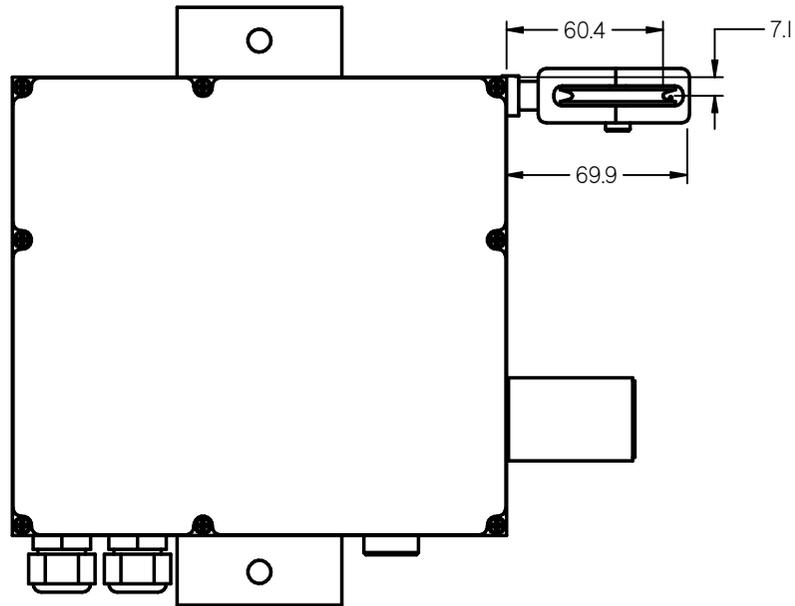DESIGNED BY DQS
DRAWN BY
FINAL APPROVAL
SIZE B
SHEET NO. I of 2

THIS ENGLISH DRAWING HAS BEEN PREPARED IN ACCORDANCE WITH ANSI Y14.5M – 1982. DIMMENSIONS SHOWN IN BRACKETS [] ARE MILLIMETERS AND FOR REFERENCE.

MICRON OPTICS

DRAWING NO.

60.4

7.1

69.9

SHEAVE IS INFINITELY ADJUSTABLE
BY ROTATING AROUND WIRE ROPE AXIS
AT THE POINT OF EXIT FROM GAGE HOUSING.

∅ 44.4

os5500 DISPLACEMENT GAGE
CUSTOMER DRAWING
WITH UNIVERSAL ACCESSORY SHEAVE

DESIGNED BY	DRAWN BY	FINAL APPROVAL	SIZE	SHEET NO.
DQS			B	2 of 2

THIS ENGLISH DRAWING HAS BEEN PREPARED IN
ACCORDANCE WITH ANSI Y14.5M – 1982. DIMMENSIONS
SHOWN IN BRACKETS [] ARE MILLIMETERS AND
FOR REFERENCE.

MICRON OPTICS

DRAWING NO.